


UNI-SFER

1520

Valvola a sfera a passaggio totale, filettatura F/F, con farfalla in alluminio.



Specifiche tecniche

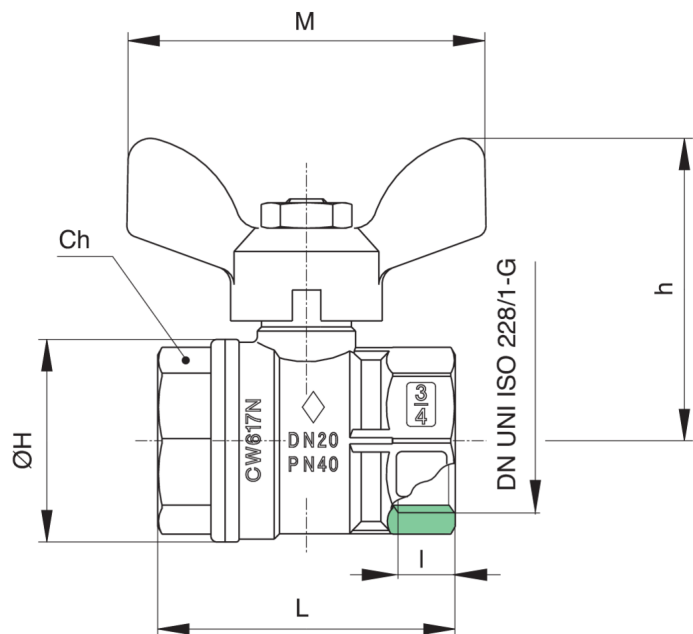

MISURA	DN	BOX	MASTER BOX	CODICE	I	L	ØH	CH	M	H	KV	PN	KG
1/4"	8	20	80	1720020000	11	51,5	23	20	50	37,5	5,4	64	0,14
3/8"	10	20	80	1720030000	11,4	51,5	23	20	50	37,5	6	64	0,12
1/2"	15	20	80	1520040000	12	47,5	30	25	50	39,5	15,7	50	0,14
3/4"	20	10	40	1520050000	12	53	36	31	64	50,5	28	40	0,23
1"	25	10	20	1520060000	14,5	65,5	43,5	38	64	53	41,5	40	0,35

Limiti di temperatura: -20°C +160°C.

*Art. [1720](#)

Disponibile coprifarfalla, art. 6670.

Applicazioni



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE