

## INTER-GAS


### 708001



Valvola a sfera in acciaio, passaggio ridotto, completamente saldata, per gas colonna montante M.P. con estremità filettata femmina/saldare di testa, con leva.



## Specifiche tecniche

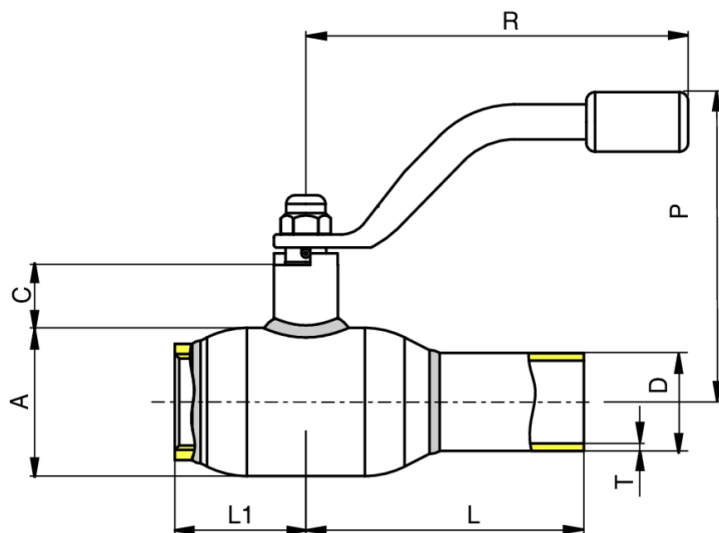

| MISURA | DN | BOX | MASTER BOX | CODICE   | A  | B  | L   | L1 | C  | T   | D    | R   | P   | KV | PN | KG   |
|--------|----|-----|------------|----------|----|----|-----|----|----|-----|------|-----|-----|----|----|------|
| 3/4"   | 20 | 5   | 10         | 70800105 | 42 | 15 | 115 | 38 | 17 | 2,3 | 26,9 | 140 | 85  | 6  | 40 | 0,80 |
| 1"     | 25 | 5   | 10         | 70800106 | 51 | 20 | 115 | 45 | 17 | 2,6 | 33,7 | 140 | 89  | 14 | 40 | 0,90 |
| 1"1/4  | 32 | 5   | 10         | 70800107 | 57 | 25 | 130 | 53 | 17 | 2,6 | 42,4 | 140 | 93  | 26 | 40 | 1,30 |
| 1"1/2  | 40 | 2   | 4          | 70800108 | 76 | 32 | 130 | 60 | 20 | 2,6 | 48,3 | 180 | 108 | 43 | 40 | 2,00 |
| 2"     | 50 | -   | 4          | 70800110 | 89 | 40 | 150 | 73 | 20 | 2,9 | 60,3 | 180 | 114 | 64 | 40 | 2,90 |

Limiti di temperatura: -20°C +80°C.

# Applicazioni



GAS