


M/M 45° bend.



Technical specifications

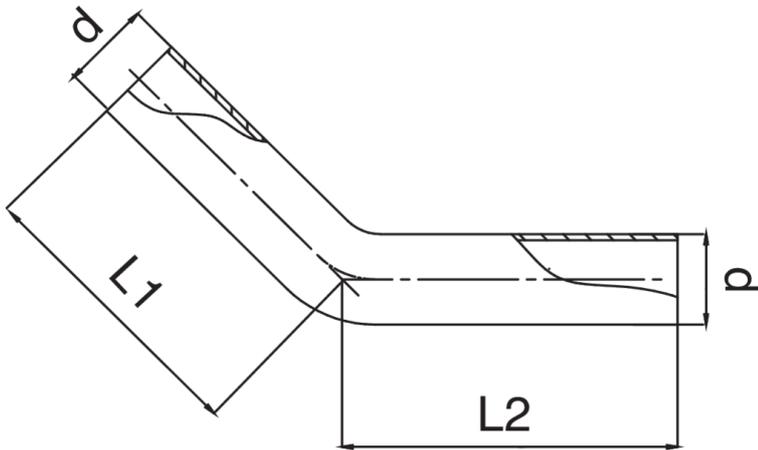

| D | BAG | MASTER BOX | CODE | L1 | L2 |
|----|-----|------------|-----------------|-----|-----|
| 15 | 10 | 40 | ZX0045015015000 | 62 | 120 |
| 18 | 10 | 30 | ZX0045018018000 | 58 | 124 |
| 22 | 5 | 20 | ZX0045022022000 | 56 | 120 |
| 28 | 5 | 15 | ZX0045028028000 | 58 | 122 |
| 35 | 5 | 10 | ZX0045035035000 | 94 | 206 |
| 42 | 1 | 5 | ZX0045042042000 | 114 | 262 |
| 54 | 1 | 5 | ZX0045054054000 | 146 | 321 |

Applications



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



FIREFIGHTING



MARINE



STEAM



SOLAR



INDUSTRIAL