


## BUBBLE-SFER

### 20D0

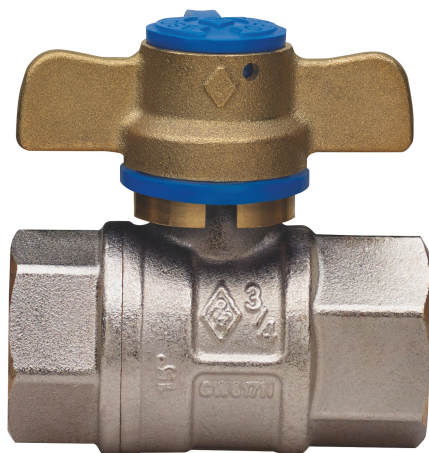


Full bore ball valve for water meter entry, F/F threaded, with **anti-tampering** T-handle and **heptagonal-shaped stainless steel security nut**, ball with automatic rinsing system.

**NEW**



### Technical specifications

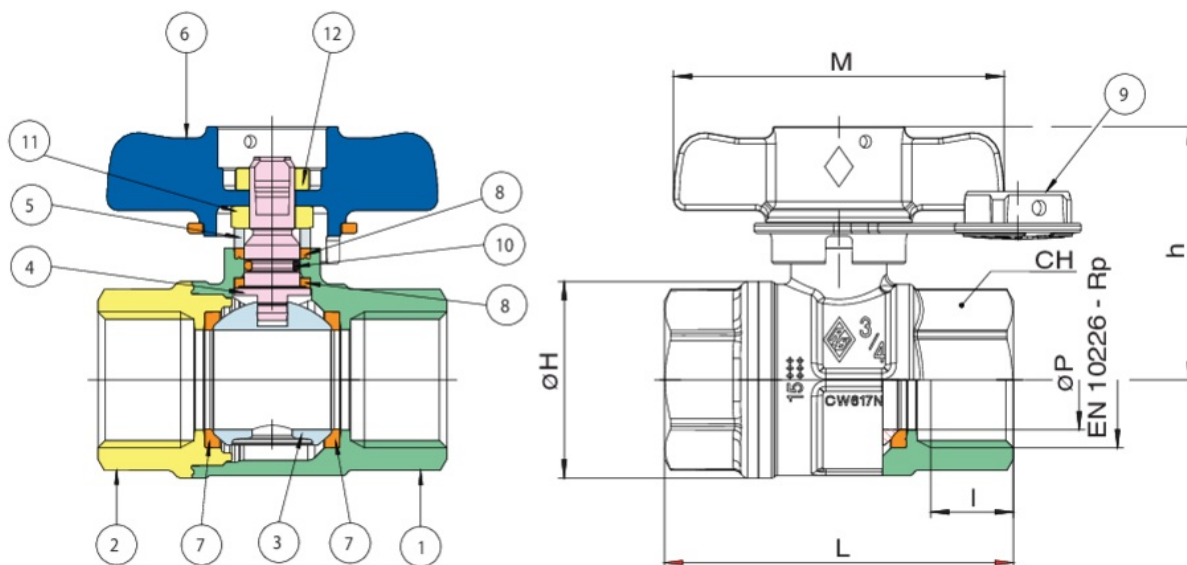

| POSITION | PART NAME               | MATERIAL                             | N.° PIECES |
|----------|-------------------------|--------------------------------------|------------|
| 1        | BODY                    | BRASS CW617N UNI EN 12420            | 1          |
| 2        | END CONNECTION          | BRASS CW617N UNI EN 12420            | 1          |
| 3        | BALL                    | BRASS CW617N UNI EN 12420            | 1          |
| 4        | STEM                    | BRASS CW614N UNI EN12164-UNI EN12168 | 1          |
| 5        | PACKING GLAND           | BRASS CW614N UNI EN12164-UNI EN12168 | 1          |
| 6        | T-HANDLE                | BRASS CW617N UNI EN 12420            | 1          |
| 7        | BALL SEAT               | PTFE                                 | 2          |
| 8        | STEM SEAL/THRUST WASHER | PTFE                                 | 2          |
| 9        | TAP                     | PE                                   | 1          |
| 10       | O-RING                  | NBR                                  | 1          |
| 11       | NUT                     | STEEL CL 04 UNI EN ISO898            | 1          |
| 12       | HEPTAGONAL-SHAPED NUT   | STAINLESS STEEL AISI 430             | 1          |

| SIZE | DN | BOX | MASTER BOX | CODE       | ØP | I    | L  | ØH | CH | M  | H    | KV   | PN | KG   |
|------|----|-----|------------|------------|----|------|----|----|----|----|------|------|----|------|
| 1/2" | 15 | 15  | 60         | 20D0040001 | 15 | 15   | 62 | 33 | 27 | 55 | 41,5 | 16,3 | 64 | 0,27 |
| 3/4" | 20 | 10  | 40         | 20D0050001 | 20 | 16,3 | 69 | 39 | 32 | 65 | 50   | 29,5 | 64 | 0,43 |
| 1"   | 25 | 10  | 20         | 20D0060001 | 25 | 19,1 | 83 | 49 | 38 | 65 | 54   | 43   | 64 | 0,63 |

# Applications

