




5940

Degreased full bore ball valve for non-medical oxygen usage, F/F threaded, with aluminium handle.

Technical specifications

Drawing

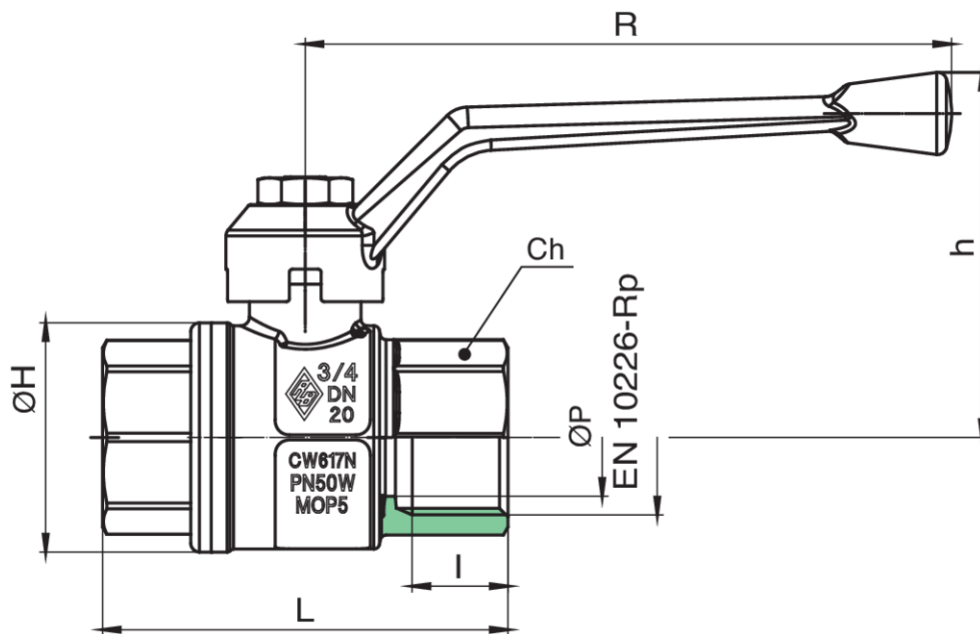

Table

| CODE | SIZE | DN | UNITS PER BOX | MASTER BOX | ØP | I | L | ØH | CH | R | H | KV | PN | KG |
|------------|-------|-----|---------------|------------|-----|------|-------|-----|-----|-----|------|------|----|-------|
| 5940020000 | 1/4" | 8 | 20 | 80 | 10 | 11 | 51.5 | 23 | 20 | 95 | 46.5 | 5.4 | 64 | 0.14 |
| 5940030000 | 3/8" | 10 | 20 | 80 | 10 | 11.4 | 51.5 | 23 | 20 | 95 | 46.5 | 6 | 64 | 0.12 |
| 5940040000 | 1/2" | 15 | 20 | 80 | 15 | 15 | 62 | 33 | 25 | 95 | 50 | 16.3 | 64 | 0.2 |
| 5940050000 | 3/4" | 20 | 10 | 40 | 20 | 16.3 | 69 | 39 | 31 | 110 | 62 | 29.5 | 50 | 0.33 |
| 5940060000 | 1" | 25 | 10 | 20 | 25 | 19.1 | 83 | 49 | 38 | 110 | 66 | 43 | 50 | 0.51 |
| 5940070000 | 1"1/4 | 32 | 6 | 12 | 32 | 21.4 | 96 | 59 | 48 | 160 | 79 | 89 | 50 | 0.84 |
| 5940080000 | 1"1/2 | 40 | 4 | 8 | 40 | 21.4 | 108 | 73 | 54 | 160 | 85.5 | 230 | 40 | 1.24 |
| 5940100000 | 2" | 50 | 2 | 4 | 50 | 25.7 | 127.5 | 86 | 67 | 170 | 103 | 265 | 40 | 1.96 |
| 5940120000 | 2"1/2 | 65 | 2 | 4 | 65 | 30.2 | 152 | 111 | 90 | 205 | 129 | 540 | 25 | 3.65 |
| 5940140000 | 3" | 80 | - | 4 | 80 | 33.3 | 177 | 136 | 105 | 205 | 140 | 873 | 25 | 5.87 |
| 5940180000 | 4" | 100 | - | 2 | 100 | 39.3 | 214 | 166 | 130 | 260 | 160 | 1390 | 25 | 10.49 |

Notes

Temperature range: -20°C +80°C.

Applications



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE