

EXPO-SFER


1820

Full bore ball valve, F/F threaded, with aluminium T-handle.



Technical specifications

Drawing

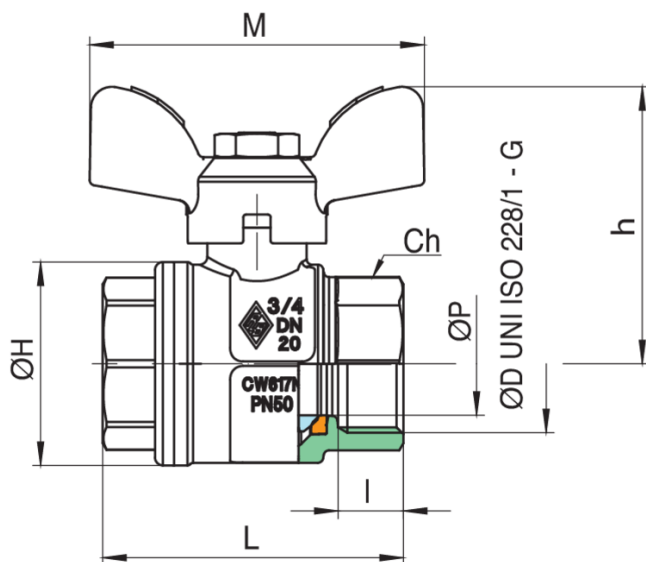

Table

| SIZE | DN | UNITS PER BOX | MASTER BOX | CODE | ØP | I | L | ØH | CH | M | H | KV | PN | KG |
|------|----|---------------|------------|------------|----|------|------|----|----|----|------|------|----|------|
| 1/4" | 8 | 20 | 80 | 1720020000 | 10 | 11 | 51.5 | 23 | 20 | 50 | 37.5 | 5.4 | 64 | 0.14 |
| 3/8" | 10 | 20 | 80 | 1720030000 | 10 | 11.4 | 51.5 | 23 | 20 | 50 | 37.5 | 6 | 64 | 0.12 |
| 1/2" | 15 | 20 | 80 | 1820040000 | 15 | 13.5 | 55 | 33 | 25 | 50 | 41 | 16.3 | 64 | 0.18 |
| 3/4" | 20 | 10 | 40 | 1820050000 | 20 | 12.5 | 57.5 | 39 | 31 | 64 | 53 | 29.5 | 50 | 0.28 |
| 1" | 25 | 10 | 20 | 1820060000 | 25 | 15 | 69.5 | 49 | 38 | 64 | 57 | 43 | 50 | 0.46 |

Notes

Cover available art. 6670 page 309.

Applications



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE