


## 2310

Full bore ball valve, F/F threaded, with steel handle and rinsing/compensation hole.

### Technical specifications

#### Drawing

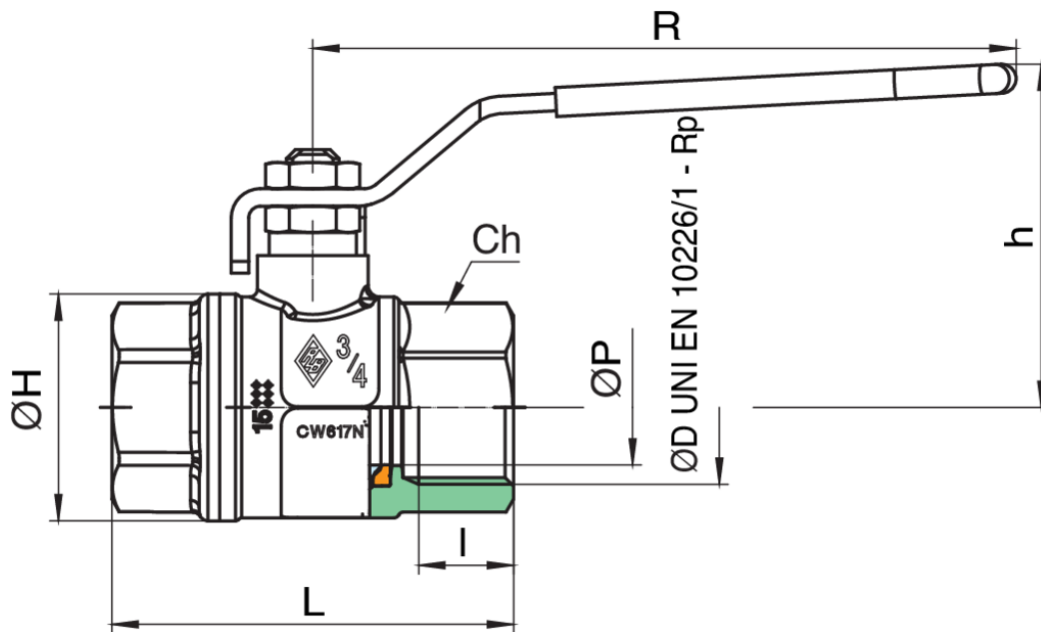

#### Table

CODE	SIZE	DN	UNITS PER BOX	MASTER BOX	ØP	I	L	ØH	CH	R	H	KV	PN	KG
1710020000	1/4"	8	20	80	10	11	51.5	23	20	95	43	5.4	64	0.15
1710030000	3/8"	10	20	80	10	11.4	51.5	23	20	95	43	6	64	0.14
1710120000	2 1/2"	65	2	4	65	30.2	152	111	90	206	123	540	25	3.73
1710140000	3"	80	-	4	80	33.3	177	136	105	206	133	873	25	5.95
1710180000	4"	100	-	2	100	39.3	214	166	130	261	166	1390	25	10.57
2310040000	1/2"	15	20	80	15	15	62	33	27	96	46.5	16.3	64	0.22
2310050000	3/4"	20	10	40	20	16.3	69	39	32	121	59	29.5	64	0.34
2310060000	1"	25	10	20	25	19.1	83	49	38	121	63	43	64	0.53
2310070000	1 1/4"	32	6	12	32	21.4	96	59	48	151	76	89	50	0.82
2310080000	1 1/2"	40	4	8	40	21.4	108	73	54	151	82.5	230	40	1.21
2310100000	2"	50	2	4	50	25.7	127.5	87	67	160	95.5	265	40	1.9

## NOTES

Temperature range: -20°C +160°C

---

## Applications

---



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE