



## UNI-SFER

### 4583



Ball valve, male thread, with ring nut, aluminium T-handle.

## Technical specifications

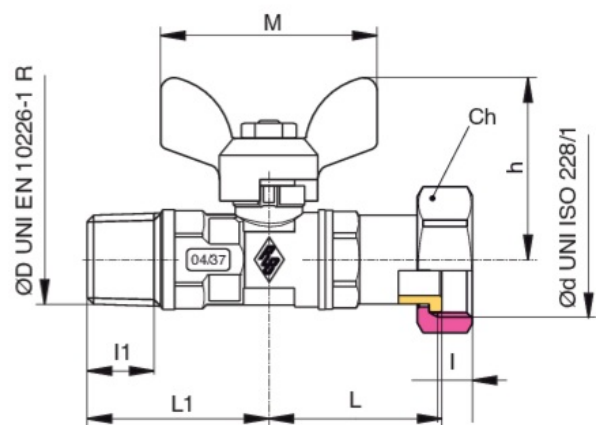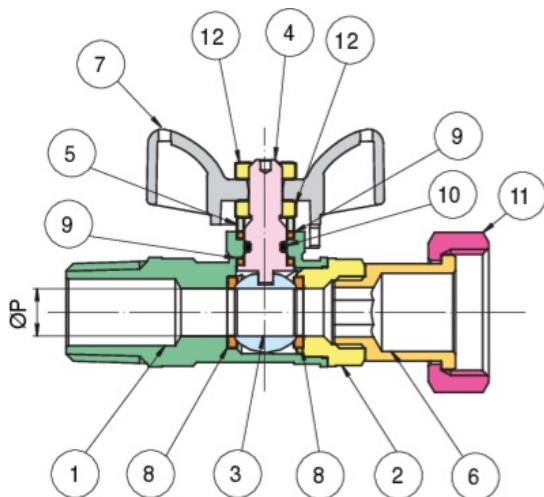

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	BRASS CW617N UNI EN 12165	1
2	END CONNECTION	BRASS CW617N UNI EN 12165	1
3	BALL	BRASS CW614N UNI EN 12164	1
4	STEM	BRASS CW614N UNI EN 12164	1
5	BUSH	BRASS CW617N UNI EN 12165	1
6	UNION TAIL	BRASS CW617N UNI EN 12165	1
7	T-HANDLE	ALUMINIUM EN-AC 46100	1
8	BALL SEAT	PTFE	2
9	THRUST WASHER	PTFE	2
10	O-RING	NBR	1
11	NUT	BRASS CW617N UNI EN 12165	1
12	NUT	STEEL 6/S	2

ØD X ØD	BOX	MASTER BOX	CODE	ØP	L	L1	L	L1	CH	H	M	PN	KG
1/2" x 1/2"	20	80	4583250000	10	34,75	42	8	15	24	38,5	50	30	0,20
1/2" x 3/4"	10	40	4583260000	10	40	42	8	15	30	38,5	50	30	0,24
3/4" x 3/4"	10	40	4583270000*	14	29	10,7	9,5	29,2	30	35,5	38	16	0,21

Temperature range: -15°C +120°C.

\*No nickel-plated version thread ISO 228/1.

## Applications



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



INDUSTRIAL



MARINE