



RG5240

F/F reducing coupling.



Technical specifications

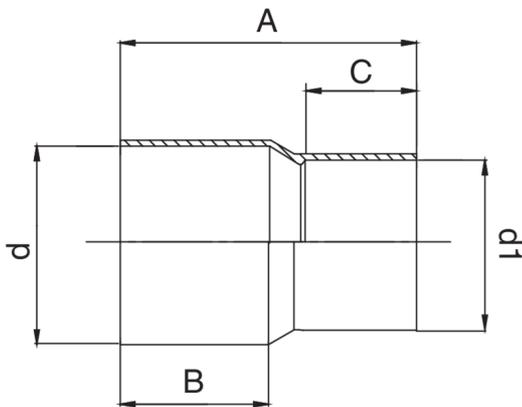

| D X D1  | BAG | MASTER BOX | CODE            | A  | B MIN | C MIN |
|---------|-----|------------|-----------------|----|-------|-------|
| 28 x 22 | 10  | 200        | RG5240028022000 | 45 | 18,4  | 15,4  |
| 35 x 22 | 10  | 200        | RG5240035022000 | 52 | 23    | 15,4  |
| 35 x 28 | 10  | 150        | RG5240035028000 | 57 | 23    | 18,4  |
| 42 x 22 | 5   | 100        | RG5240042022000 | 59 | 27    | 15,4  |
| 42 x 28 | 5   | 100        | RG5240042028000 | 60 | 27    | 18,4  |
| 42 x 35 | 5   | 100        | RG5240042035000 | 61 | 27    | 23    |
| 54 x 35 | 5   | 70         | RG5240054035000 | 79 | 32    | 23    |
| 54 x 42 | 5   | 70         | RG5240054042000 | 75 | 32    | 27    |

Applications



DRINKING  
WATER



GAS



COMPRESSED  
AIR



HVAC



SOLAR



INDUSTRIAL



REFRIGERATION