



## 5N4600

Joint avec bride PN6.

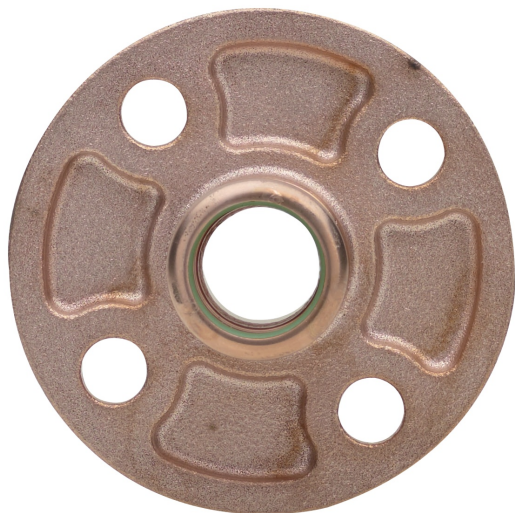

### Spécifications techniques

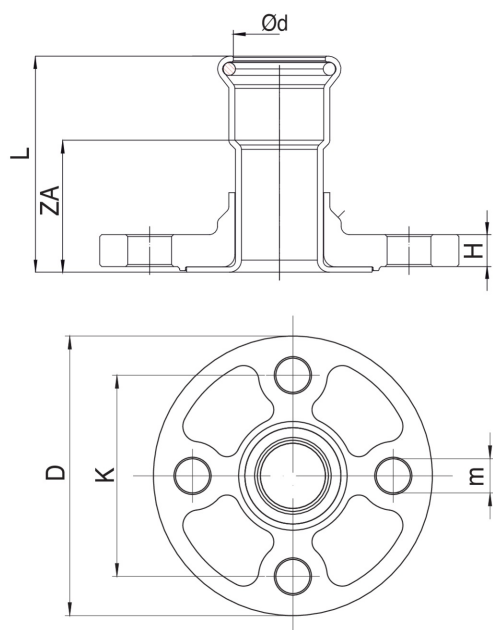

| D    | BAG | MASTER BOX | CODE      | DN  | L     | H  | D   | K   | ZA   | M  | N° HOLES |
|------|-----|------------|-----------|-----|-------|----|-----|-----|------|----|----------|
| 15   | 5   | 40         | 5N460015  | 10  | 43,5  | 8  | 80  | 55  | 24,5 | 11 | 4        |
| 18   | 5   | 40         | 5N460018  | 15  | 50    | 8  | 80  | 55  | 30,5 | 11 | 4        |
| 22   | 5   | 40         | 5N460022  | 20  | 54    | 8  | 90  | 65  | 33   | 11 | 4        |
| 28   | 2   | 20         | 5N460028  | 25  | 59    | 8  | 100 | 75  | 37   | 11 | 4        |
| 35   | 2   | 16         | 5N460035  | 32  | 68    | 8  | 120 | 90  | 41   | 14 | 4        |
| 42   | 2   | 30         | 5N460042  | 40  | 72,5  | 10 | 130 | 100 | 42,5 | 14 | 4        |
| 54   | 2   | 8          | 5N460054  | 50  | 82,5  | 12 | 140 | 110 | 47,5 | 14 | 4        |
| 76,1 | 1   | 5          | 5N460076  | 65  | 94    | 14 | 160 | 130 | 40   | 14 | 4        |
| 88,9 | 1   | 3          | 5N460088  | 80  | 119,5 | 14 | 190 | 150 | 58,5 | 18 | 4        |
| 108  | 1   | 2          | 5N4600108 | 100 | 132,5 | 16 | 210 | 170 | 56,5 | 18 | 4        |

# Applications



MARINE