


1701



Robinet à boisseau sphérique à passage total, taraudée M/F, avec poignée en aluminium.

Spécifications techniques

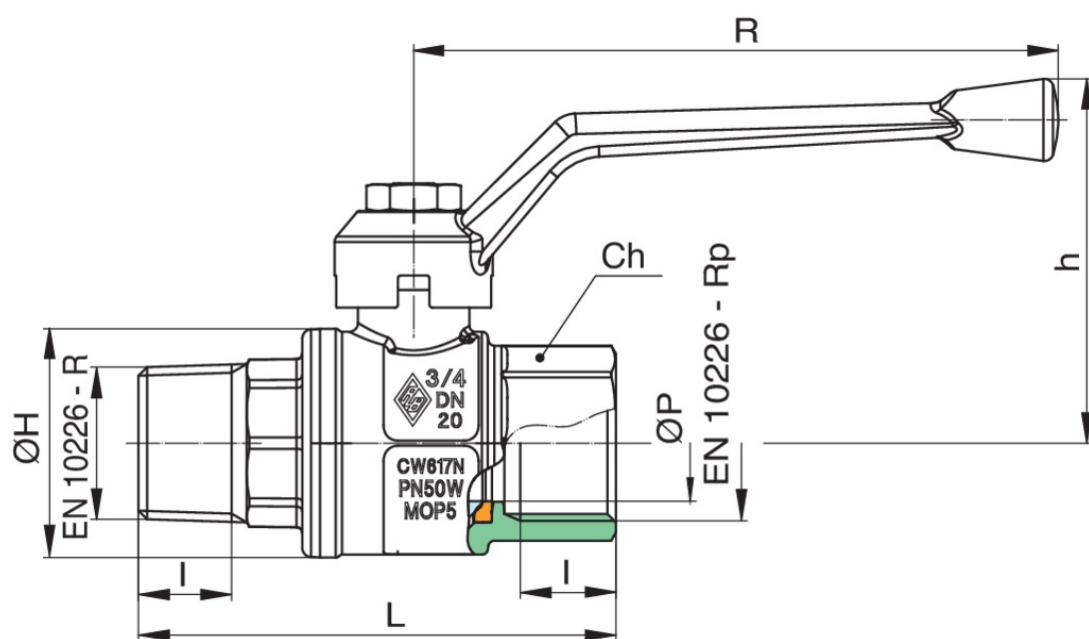

TAILLE	DN	BOX	MASTER BOX	CODE	ØP	I	L	ØH	CH	R	H	KV	PN	KG
1/4"	8	20	80	1701020000	10	11	59	23	20	95	46,5	5,4	64	0,14
3/8"	10	20	80	1701030000	10	11,4	59,5	23	20	95	46,5	6	64	0,14
1/2"	15	20	80	1701040000	15	15	72,5	33	25	95	50	16,3	64	0,21
3/4"	20	10	40	1701050000	20	16,3	81,5	39	31	110	62	29,5	50	0,36
1"	25	10	20	1701060000	25	19,1	94,5	49	38	110	66	43	50	0,54
1 1/4"	32	6	12	1701070000	32	21,4	111	59	48	160	79	89	50	0,91
1 1/2"	40	4	8	1701080000	40	21,4	119	73	54	160	85,5	230	40	1,27
2"	50	2	4	1701100000	50	25,7	141,5	86	67	170	103	265	40	2,03
2 1/2"	65	2	4	1701120000	65	30,2	175	111	90	205	129	540	25	4,05
3"	80	-	3	1701140000	80	33,3	203,5	136	105	205	140	873	25	6,27
4"	100	-	2	1701180000	100	39,3	250	166	130	260	160	1390	25	11,79

Temperature range: -20°C +160°C.

Applications



DRINKING WATER



HEATING



HVAC



COMPRESSED AIR



INDUSTRIAL



MARINE