




Curva 45° M/F in rame.



## Specifiche tecniche

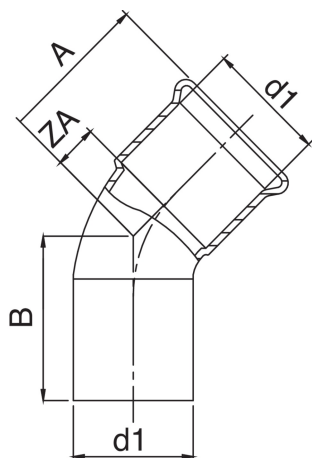

| D1 | BAG | MASTER BOX | CODICE          | A  | B  | ZA |
|----|-----|------------|-----------------|----|----|----|
| 12 | 10  | 250        | ZM9040012012000 | 23 | 30 | 5  |
| 15 | 10  | 200        | ZM9040015015000 | 28 | 37 | 8  |
| 18 | 10  | 150        | ZM9040018018000 | 29 | 37 | 9  |
| 22 | 10  | 100        | ZM9040022022000 | 34 | 42 | 11 |
| 28 | 5   | 60         | ZM9040028028000 | 37 | 42 | 14 |
| 35 | 5   | 40         | ZM9040035035000 | 44 | 46 | 18 |
| 42 | 5   | 20         | ZM9040042042000 | 51 | 68 | 21 |
| 54 | 1   | 10         | ZM9040054054000 | 62 | 72 | 27 |

## Applicazioni



DRINKING  
WATER



HEATING



HVAC



COMPRESSED  
AIR



FIREFIGHTING