



UNI-SFER

1530

Valvola a sfera a passaggio totale, filettatura F/F, con farfalla prolungata, in poliammide, anticondensa e antigoccia.

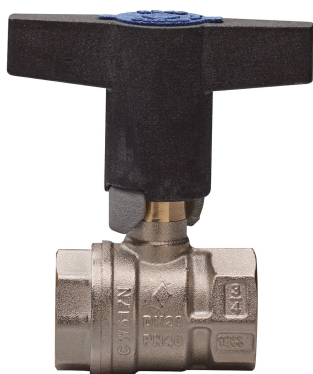

Specifiche tecniche

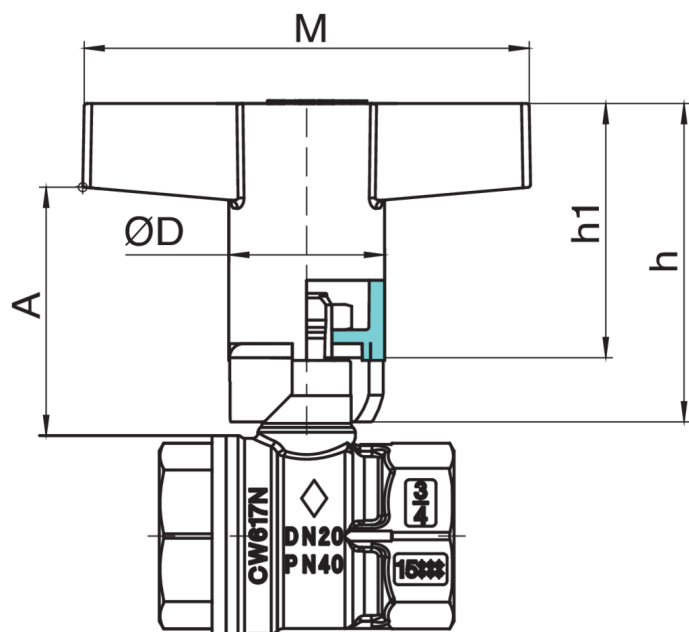

MISURA	DN	BOX	MASTER BOX	CODICE	ØD	H	H1	M	A	PN	KG
1/2"	15	25	50	1530040000	28	55	45,5	80	41	50	0,14
3/4"	20	20	40	1530050000	28	57	45,5	80	45	40	0,24
1"	25	15	30	1530060000	28	57	45,5	80	43,5	40	0,37
1"1/4	32	6	12	1530070000	38	82,3	67,5	120	64	40	0,62
1"1/2	40	4	8	1530080000	38	82,3	67,5	120	63,5	40	0,91
2"	50	2	4	1530100000	38	82,3	67,5	120	66,5	40	1,55

Limiti di temperatura: -20°C +160°C.

Disponibile termometro artt. [RI761-762-763-764-765-766-767-768](#).

Applicazioni



DRINKING
WATER



HEATING



HVAC



COMPRESSED
AIR



INDUSTRIAL



MARINE