


BUBBLE-SFER QB

20D6 QB



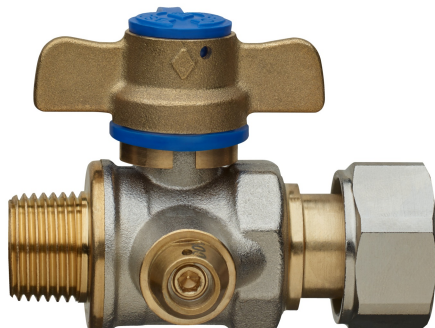


Full bore ball valve for water meter entry, male end/ring nut, with **anti-tampering** T-handle and **heptagonal-shaped stainless steel security nut**, unidirectional, with minimum vital water flow device and ball with automatic rinsing system.

NEW



Technical specifications

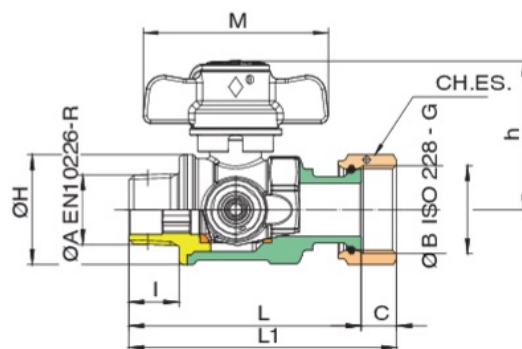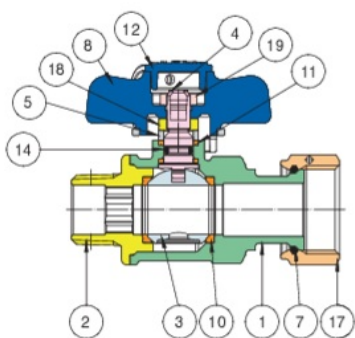

POSITION	PART NAME	MATERIAL	N.° PIECES
1	BODY	BRASS CW617N UNI EN 12420	1
2	END CONNECTION	BRASS CW614N UNI EN12164-UNI EN12168	1
3	BALL	BRASS CW617N UNI EN 12420	1
4	STEM	BRASS CW614N UNI EN12164-UNI EN12168	1
5	PACKING GLAND	BRASS CW614N UNI EN12164-UNI EN12168	1
6	CIRCLIP	STAINLESS STEEL AISI 304	1
7	CIRCLIP	BRASS CW614N UNI EN12164-UNI EN12168	1
8	T-HANDLE	BRASS CW617N UNI EN 12420	1
9	SEAT	NBR	-
10	BALL SEAT	PTFE	2
11	STEM SEAL/THRUST WASHER	PTFE	2
12	TAP	PE	1
13-14	O-RING	NBR	1
15-16	O-RING	EPDM PEROX	1
17	NUT	BRASS CW614N UNI EN12164-UNI EN12168	1
18	NUT	STEEL	1
19	HEPTAGONAL-SHAPED NUT	STAINLESS STEEL AISI 430	1
20	OBSTRUCTOR	-	1

SIZE	DN	BOX	MASTER BOX	CODE	ØP	I	L	ØH	C	M	H	KV	PN	KG	Q (L/GG)*
1/2"x3/4"	15	10	40	20D6260301	15	13,5	69,5	33	10,5	55	44,5	16,3	64	0,34	300

Q=Flow rate classes.

Applications



DRINKING
WATER



MULTIUTILITY ONLY